

Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290

Tel. 0425 843129 e-mail: info@silidea.it web-site: www.silidea.it

settable ≥1min

BMS battery management system for litium rechargeable battery pack Model: BMS NOVA BK3 **Electrical Characteristics** Test item Criterion No. All rechargeable lithium Type Number of cells 7÷15 Type of cells Range voltage for single cell 1,5÷4,5 VDC 1 Cells in series yes (7÷15) Cells in parallels ves 15÷60 VDC Range min/max 2 Voltage 1 mV Minimum voltage measured Low Current consumption for single cell with ≤100 nA auxiliary charger Continuous charging current 7A 10A 3 Current Maximal charging current for 1 minute 20A Continuous discharging current Maximal discharging current for 1 minute 25A Minimum measured current 10 mA Type of Balance Passive Number of balance three type (A,B,C) 4 Balance Minimun balance voltage for single cell 1 mV Balance current for single cell 84 mA settable ±1mV Over charge detection voltage 5 Over charge Protection settable ±1mV Over charge release voltage settable ±1mV Over discharge detection voltage 6 Over discharge protection settable ±1mV Over discharge release voltage Over discharge detection current settable ±1A 7 Over current protection Detection delay time settable ±1s fuse Shorth circuit max current 8 Shorth circuit Settable on/off no Number of sensors of temperature (cells) 1 1 Number of sensors of temperature (PCB) 9 Temperature settable ±1°C Battery temperature misure settable ±1°C PCB temperature misure Real time clock yes 10 Time

file: BMS NOVA BK3 REV01.xls pag. 1/6

Auto power off



Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290 Tel. 0425 843129

e-mail: info@silidea.it web-site: www.silidea.it

BMS battery management system for litium rechargeable battery pack					
Model: BMS NOVA BK3					
Communications					
1	Communication	Buzzer	no		
		USB	1		
		TX opto isolated	1		
		RS485 opto isolated	no		
		i2C	optional		
		Digital output	4		
		Digital input	0		
		Led command output	4		
		Led view system state	2		
		Bluetooth	yes		
2	Parameters of BMS	Settable by PC	yes		
3	Software of comunication	windows support	yes		
4	Comunication with smartphone	Application Android	yes		
5	Comunication with smartphone	Application los	In development		

BMS battery management system for litium rechargeable battery pack					
Model: BMS NOVA BK3					
Internal memory of the BMS					
No.	Test item		Criterion		
1	Time	Day last charge	yes		
		Data of last charge	yes		
		Charge cycles	yes		
		Max time between charges counter	yes		
2	Current	Register of Amper/hours	yes		
3	Operation data	Internal register	11 parameters		
4	Production data	Internal register	4 parameters		
5	Historical log data short	Register fifo	64 events		
6	Historical log data long	Register fifo	400 days		

file: BMS NOVA BK3 REV01.xls pag. 2/6



Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290

Tel. 0425 843129 e-mail: info@silidea.it web-site: www.silidea.it

-20. +85 °C

BMS battery management system for litium rechargeable battery pack Model: BMS NOVA BK3

Electrical and Mechanical Characteristics No. Test item Criterion Type of core Micro Controller 16 bit 1 2 Misure current Analog-to-Digital Converters 16 bit 3 Misure Voltage Analog-to-Digital Converters 16 bit high efficiency 4 Power regulator Switching Regulators Single switch SPST no 5 ON/OFF Single push button yes Without aux Start charger Directly (charger wiht present voltage in out) 6 99.98% 7 Efficiency BMS At maximun power State views 8 Led 1 on board charge/discharge Led 2 on board on/off bluetooth 9 State views 10 Led 1 out board 25% SOC State views, external led 11 Led 2 out board State views, external led 50% SOC 12 Led 3 out board State views, external led 75% SOC 13 Led 4 out board State views, external led 100% SOC 14 Fuse 58V (the values depend from the use) BLADE MINI 58V@30Amp Fuse power on board 15 Bidirectional charge interruption ves 16 Precharge output load no ≤400 nA 17 Power consumation Stand By State ≤30 mA ON State all power on 18 Power consumation PHR-8 + PHR-10 JST connector PH 19 Signal connector cells and temp PHR-xx 20 Various signal connector JST connector PH 21 Solder pcb not present Connection aux charger soldering 22 Connection negative battery Pad on PCB Pad on PCB Connection negative load soldering 23 Connection negative charge Pad on PCB soldering 24 25 Connection positive battery Pad on PCB soldering Connection positive load/charger Pad on PCB soldering 26 26 Connection power fuse Power portafuse PCB portafuse Command FR4 **PCB** 27 CEM1 Power 28 Weight Measure (with fuse) 58 g 29 Dimension Measure 100*65*20 mm IP International Protection 30 Rating no 31 Case Type no Operating Temperature Range -20, +70 °C 32 **Temperature**

file: BMS NOVA BK3 REV01.xls pag. 3/6


Storage Temperature Range




Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290 Tel. 0425 843129

> e-mail: info@silidea.it web-site: www.silidea.it

SCHEMATIC DESIGN:

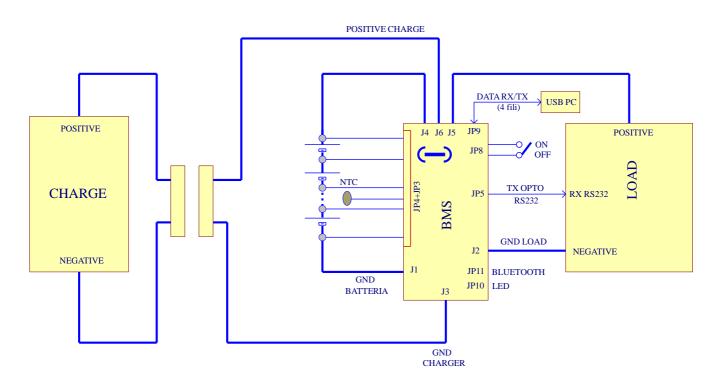

SCHEMATIC CONNECTIONS:

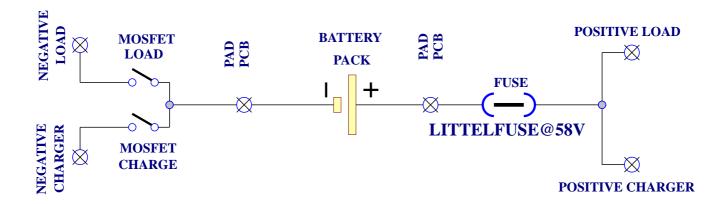


file: BMS NOVA BK3 REV01.xls pag. 4/6



Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290


Tel. 0425 843129 e-mail: info@silidea.it web-site: www.silidea.it


SOFTWARE CONNECTION PC:

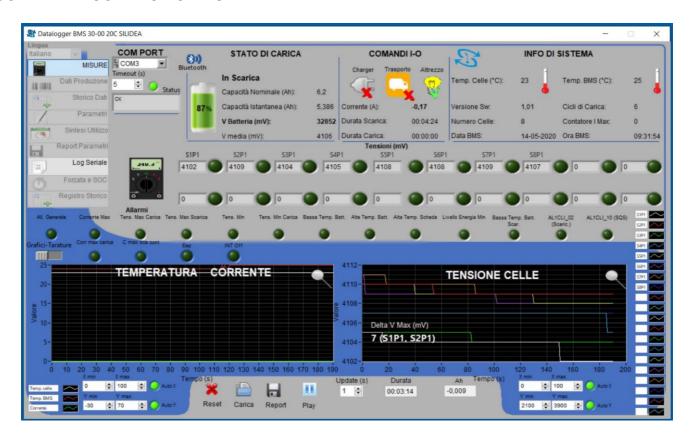


APP SMARTPHONE:



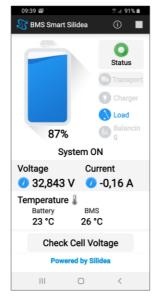

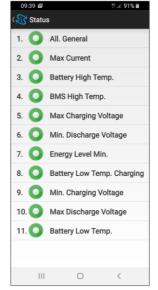

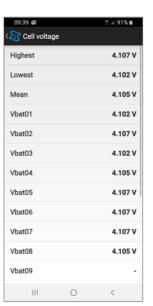

https://play.google.com/store/apps/details?id=it.silidea.downloader

file: BMS NOVA BK3 REV01.xls pag. 5/6




Silidea S.r.l. Via dell'Industria Nord, 51 45030 Calto (RO) Italy P.IVA - C.F.: 01313170290 Tel. 0425 843129

e-mail: info@silidea.it web-site: www.silidea.it

PHOTO OF THE PRODUCT:



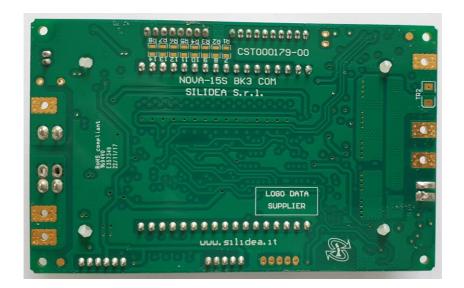

Designed by:

www.silidea.it www.silidea.com info@silidea.it

2020-05-14 REV01