

BMS battery management system for lithium rechargeable battery pack			
Model: LIBRA05400			
Electrical Characteristics			
No.	Test item		Criterion
1	Type of cells	Type	All rechargeable lithium
		Number of cells	3÷5
		Range voltage for single cell	1,5÷4,5 VDC
		Cells in series	yes
		Cells in parallel	no
2	Voltage	Range min/max	7÷24 VDC
		Minimum voltage measured	1 mV
3	Current	Low Current consumption for single cell	≤10 μA
		Maximal continuous charging current	20 A
		Maximal continuous Discharging current	50 A
		Minimum measured current	10 mA
4	Balance	Type of Balance	Passive
		Number of balance	three type (A,B,C)
		Minimum balance voltage for single cell	1 mV
		Balance current for single cell	400 mA
5	Over charge Protection	Over charge detection voltage	settable ±1mV
		Over charge release voltage	settable ±1mV
6	Over discharge protection	Over discharge detection voltage	settable ±1mV
		Over discharge release voltage	settable ±1mV
7	Over current protection	Over discharge detection current	settable ±1A
		Detection delay time	settable ±1s
8	Temperature	Battery temperature misure	Settable ±1°C
		PCB temperature misure	Settable ±1°C
9	Real time clock	Internal with back-up battery	yes
10	Comunication	USB	yes
		I2C	yes
		TX opto isolated	no
11	Parameters of the bMS	Settable by PC	yes
12	Software of comunication	windows support	yes


BMS battery management system for lithium rechargeable battery pack
Model: LIBRA05400
Memory internal of the BMS

No.	Test item		Criterion
1	Time	Day last charge	yes
		Data of last charge	yes
		Charge cycles	yes
2	Current	Register of Amper/hours	yes
3	Operation data	Internal register	10 parameters
4	Production data	Internal register	4 parameters
5	Historical log data	Register fifo	64 events

BMS battery management system for lithium rechargeable battery pack
Model: LIBRA05400
Electrical and Mechanical Characteristics

No.	Test item		Criterion
1	Type of core	Micro Controller	16 bit
2	Misure current	Analog-to-Digital Converters	16 bit
3	Misure Voltage	Analog-to-Digital Converters	16 bit
4	Power regulator	Switching Regulators	higt effcienze
5	ON/OFF	Double push button	yes
6	Efficiency	At maximun power	99,98%
7	Led	State views	discharge/charge
8	Power consumption	Stand By State	≤10 μA
9	Power consumption	ON State	≤10 mA
10	PCB	Command and power	FR4
12	Weight	Measure	120 gr
13	Dimension	Measure	155*78*15 mm
14	Temperature	Operating Temperature Range	-20, +70 °C
		Storage Temperature Range	-20, +85 °C

Photo of the product:

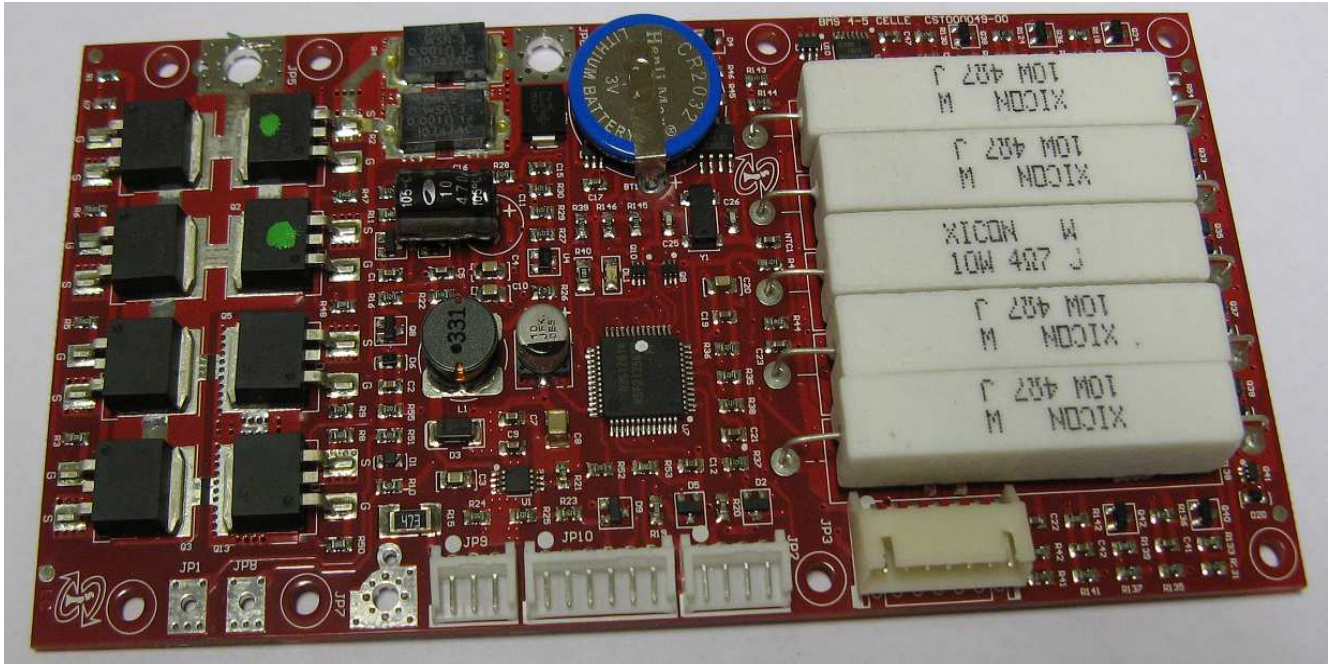

Developed by *Silidea*
www.silidea.com